


CityCharge V2

Public charging station for electric vehicles

- Type 2, 2 sockets up to 2x22kW
- Ground - mounted
- Award - winning design
- Bright LED screen
- Robust aluminum casing
- Integrated smart energy meter (MID)
- RFID authorization
- 4G / Ethernet / OCPP communication
- Elios.cloud web administration
- Managed via mobile application

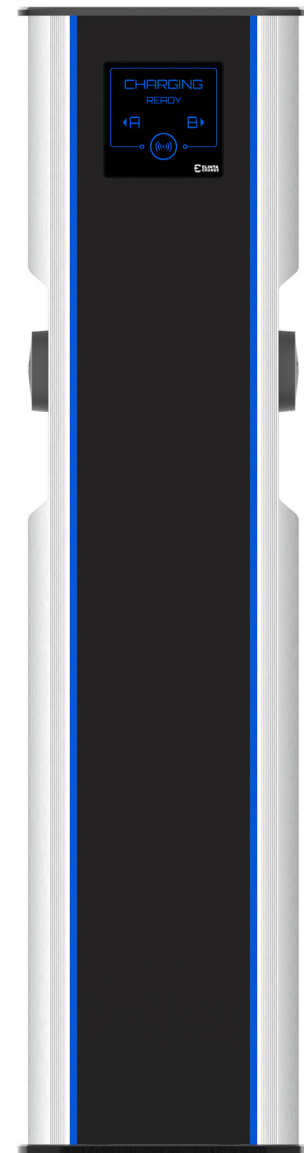

CHARGE STATION CAN BE USED AT :



Public
parking



Underground
garage



Office
buildings



Shopping
malls

CityCharge V2 is classified as fast Mode 3 charging station with ability to provide up to 44 kW (2x22 kW) of power using two Type 2 charging sockets. CityCharge V2 is manufactured using the highest quality materials. The solid housing is made of extruded CNC machined and anodized aluminum parts that are designed to last.

Top quality electronics with integrated climate control ensures highest reliability even in the worst weather conditions. Bright animated LED screen and side bars are visible even in the direct sunlight, while giving modern impression and are seen from a distance at night.

CityCharge V2

TECHNICAL SPECIFICATIONS

Socket type

2 x Type 2 Mode 3 - IEC 62196 (Mode 3)
T2S Shutter Socket (optional)



Input power

3 or 1 phase 400 V/AC 50 Hz 64 A or 32 A

Output power (optional)

2 x 3 phase 400 V/AC 32 A (2 x 22 kW)
2 x 3 phase 400 V/AC 16 A (2 x 11 kW)
2 x 1 phase 230 V/AC 32 A (2 x 7,4 kW)
2 x 1 phase 230 V/AC 16 A (2 x 3,7 kW)

Communication (optional)

4G and Ethernet communication
Elios.cloud and OCPP 1.6 JSON
Dynamic Load Management

User interface

LED backlight screen
RFID user access control
Managed via mobile application
LED status indication

Safety protection

Charging cable locking
Short circuit protection
Leakage current protection
Leakage current breaker auto reset (optional)

Other specifications

Eichrecht compatible (German calibration law)
Smart energy meters (MID)
Operational temperature -30 °C to +50 °C
IP54 electrical enclosure rating
IK10 vandalism-proof rating
UV resistant, robust aluminum housing
Dimensions 150 x 350 x 1370 mm
Weight 35 kg